

ULTIMA+  
ACOUSTICAL CEILING SOLUTIONS

**Brighten  
Your Space**



## ULTIMA +

- WHITER
- BRIGHTER
- STRONGER



## EDGES

Re-engineered for  
better fit & longer life

### BETTER FIT

New MicroLook 90 edge detail  
for an improved visual finish,  
compatible with standard &  
Silhouette designer grid

### VISUAL COMFORT

Brighter Visual  
& High Light  
reflectance

### VACCUMPAINTED EDGES



For improved  
appearance  
and durability

Product Handling Durability

### SCRATCH RESISTANCE

Durabrite Scratch  
resistant finish for  
easier handling and  
longer life

### BENEFITS

- Total Acoustics Performance [NRC+CAC].
- High light reflectance for brighter space.
- DuraBrite, reinforced, scratch resistant face.
- Soil resistant, impact resistant, scrubbable.
- Aesthetically pleasing texture.
- Hardened edges for improved handling durability
- Resistance to growth of mould
- ISO5 (Class 100) clean room performance

### APPLICATION AREAS

- **Grade 'A' Commercial Office**  
Total Acoustic Performance for flexible space utilization;  
improve concentration and increase productivity.
- **Call Center**  
Reduces worker's stress
- **Healthcare/R&D Laboratories**  
Improves patient comfort; Improves Acoustics to  
create an ideal healing environment by improving  
speech clarity, concentration & enhancing privacy.



# Ultima+ with Peakform SILHOUETTE Grid

## PHYSICAL DATA



RH99  
Humidity  
Resistant



Scratch  
Resistant



Washable



Soil  
Resistant



Product  
Handling  
Durability



Up to  
39%  
Recycled Content



87%  
Light Reflectance



Total  
Acoustics™

Armstrong Grid Options	BOARD	TEGULAR	MICROLOOK90	
	 Prelude 24mm	 Prelude 24mm	 Suprafine 15mm	 Silhouette 15 mm
	 19mm	 9.5mm 8mm 19mm	 4.5mm 8mm 19mm	
600 x 600 x 19 mm	BP1001	BP1007	BP1005	
600 x 1200 x 19 mm	BP7663M4	BP1008	BP1006	
300 x 1200 x 19 mm	---	BP1014	BP1013	

\* Special items and other sizes available upon request



NRC	125	250	500	1000	2000	4000 Hz
	0.70	0.30	0.35	0.65	0.95	0.95
	$\alpha_p$					



CAC = 41 dB



Class 0/Class 1 as per BS 476 Pt - 6&7  
Class A as per ASTM E-84




$\lambda = 0.052 - 0.057 \text{ W/mK}$



RH 99%



5 kg/m<sup>2</sup>

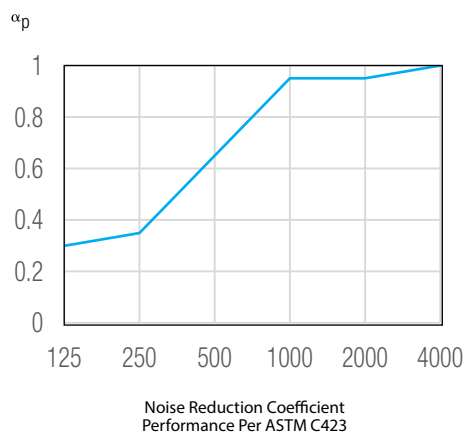

\* Warranty offered only when ceiling tiles installed with Armstrong steel angles and installation is carried out as per Armstrong Ceiling Solutions recommendations.  
For more details please refer the Armstrong Ceilings India website.

# ULTIMA +

- WHITER
- BRIGHTER
- STRONGER

**Armstrong**  
CEILING SOLUTIONS



**Armstrong World Industries (India) Pvt. Ltd.**

Boomerang, A-304, Chandivali Farm Road (near Chandivali Studio) Andheri (E), Mumbai - 400 072

Contact us: 1860 266 7080 | e-mail : [helpdeskindia@armstrongceilings.com](mailto:helpdeskindia@armstrongceilings.com) | [www.armstrongceilings.in](http://www.armstrongceilings.in)

**KNAUF**CEILING  
Solutions