


Thermostatic shower mixer for exposed installation # B1422000010



Thermostatic shower mixer for exposed installation	Dimension	Weight	Order number
Thermostatic cartridge, safety lock at 38°C, non-return valve in the hose connection,, hose connection DN15, connection size DN15, recommended operating pressure 3 - 5 bar, Surface Chrome			
Colors			
10 Chrome			
Variant			
connection type: s-union, centre distance 150 mm ± 20 mm, flow rate 15,3 l/min (3 bar), noise class I			B1422000010

All drawings contain the necessary measurements which are subject to standard tolerances. Exact measurements, in particular for customised installation scenarios, can only be taken from the finished ceramic piece.

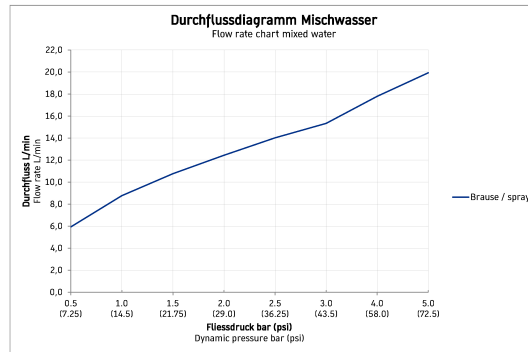