

PROVEN PRODUCT
SINCE PAST 12 YEARS



MONO FOAM
3 LAYER INSULATED

SUPREME

Premier White Water Storage Tank



Saves Energy

Insulation layers reduce the heating of the water, maintaining a difference of 20 degrees. The insulation ensures that lesser energy is utilized for cooling.



Stronger

Extra ribs have been incorporated to add strength to the tank. It reduces bulging when the tank is full, and reduces any chance of bursting under pressure.



Extra Secure

The lid design uses screws rather hinges ensuring air-tight closure. Security rings are provided to put a lock for extra security against theft and improper use.



Keeps Water Fresh

Meshed Ventilators have been built into the design that allow the water to breath and stay fresh.



More Hygienic


Food grade plastic ensures that the water does not get contaminated when in contact with the tank, and the filtered ventilation keeps dirt and flies out.



Easy Installation


Built in provision to hoist tanks.

3 LAYER
INSULATED



Inner Layer Food Grade Polymers
Insulated Middle Layer 1
Outer Premier White Colour Layer

* PLUMBING FITTINGS & VENTILATOR IS NOT PART OF THE STANDARD PRODUCT. THESE MUST BE INFORMED TO / PURCHASED SEPARATELY DURING PLACEMENT OF ORDER.

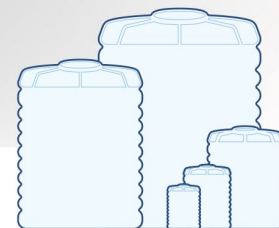

CAPACITY RANGE
500 to 10000 L

HIGHER
TEMPERATURE
INSULATION

UV
STABLE

FOOD
GRADE
POLYETHYLENE

100% VIRGIN
GRADE
POLYETHYLENE

	FWW-501	FWW-801	FWW-1001	FWW-1501	FWW-2001	FWW-3001	FWW-5001	FWW-6001	FWW-7501	FWW-10001
LITRES [L]	500	800	1000	1500	2000	3000	5000	6000	7500	10000
DIAMETER [mm]	925	1050	1120	1350	1350	1510	1955	1955	2100	2600
HEIGHT [mm]	940	1040	1200	1320	1670	2030	2120	2340	2300	2125

* SINCE THE MATERIAL IS PLASTIC, SHRINKAGE / EXPANSION OF AT LEAST 3% IS TO BE CONSIDERED IN DIMENSIONS.

PROVEN PRODUCT
SINCE PAST 12 YEARS

MONO FOAM

3 LAYER INSULATED




Capacity Range from 1000 to 10,000 Litres

Quattro Dual Foam Water Tanks come in a wide range of shapes and sizes to cater to your specific needs.

	FWW-1001	FWW-1501	FWW-2001	FWW-3001	FWW-5001	FWW-6001	FWW-7501	FWW-10001
LITRES [l]	1000	1500	2000	3000	5000	6000	7500	10000
DIAMETER [mm]	1120	1350	1350	1510	1955	1955	2100	2600
HEIGHT [mm]	1200	1320	1670	2030	2120	2340	2300	2125
INLET	6	6	6	6	6	6	6	6
OUTLET	6	6	3,6	3,6	3,6	3,6	3,6	3,6
OVERFLOW	9	9	9	9	9	9	9	9
SIZE [mm]	32	32	50	50	50	50	50	50

* SINCE THE MATERIAL IS PLASTIC, SHRINKAGE / EXPANSION OF AT LEAST 3% IS TO BE CONSIDERED IN DIMENSIONS.

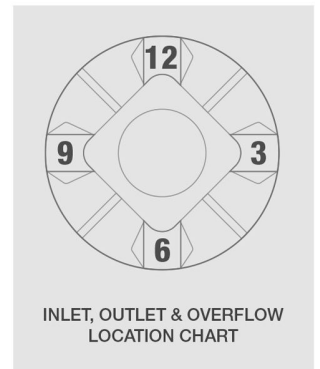

Customization

Customized solutions for both domestic and commercial usage are provided. Tank accessories are in-built according to design specified.

Plumbing Facilities

Multi options for inlet, outlet and over-flow for specific configurations can be incorporated.

AVAILABLE SIZES: 25 MM, 32 MM, 50 MM
(standard BSP threads)

Multiple Ventilators

Multiple ventilators with insect proof screen can be installed on a single tank.

COMMON SIZE



An ISO 9001: 2000
Certified Company



Society of Asian Rotomoulders