

# True™ Wood

NOW IN  
PLANK SIZES


HRC  
High Recycled Content



The mark of  
responsible forestry



USG

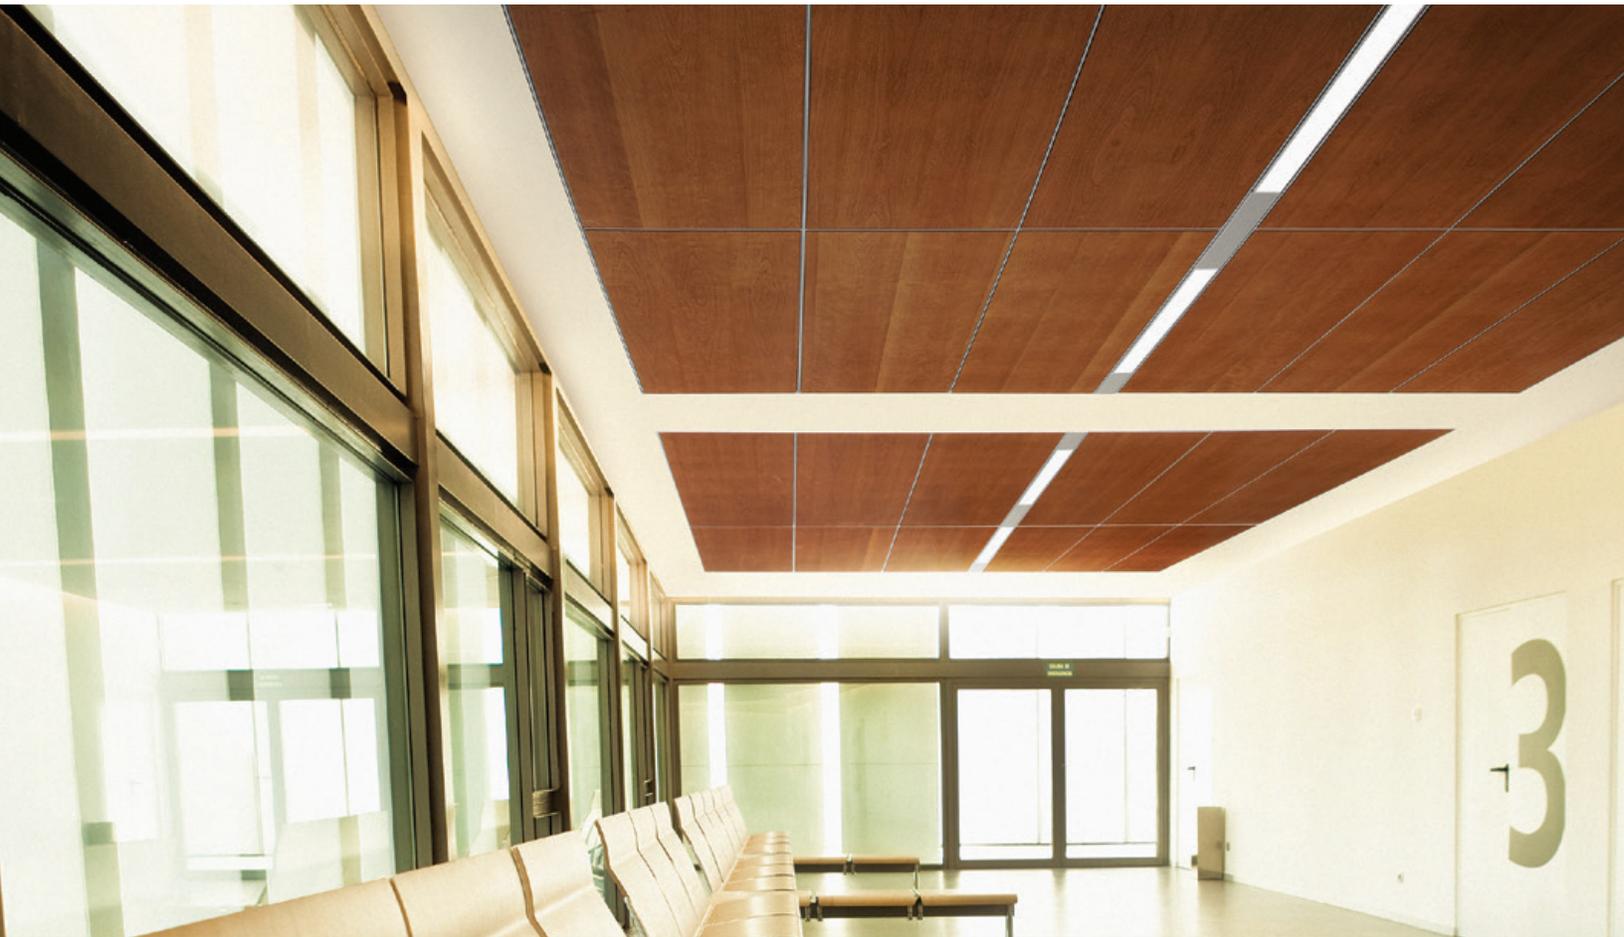

True Wood Panels DOWN IDENTITEE DXI

#### Features and Benefits

- The elegance, warmth and majesty of true wood.
- Natural wood veneers.
- Standard panel sizes of 2'x2', 2'x4' and linear.
- Plank sizes: 1'x4', 1'x5', 2'x6', 2'x8', 20"x60", 30"x60".
- Acoustical options, with an integrated acoustical backer.
- FSC certified.
- Class A fire rating per ASTM E1264.

#### Applications

- Schools
- Healthcare
- Conference rooms
- Restaurants
- Retail stores

See LEED report tool at [usgdesignstudio.com](http://usgdesignstudio.com)  
for detailed sustainability information.



2'x2' True Wood W500 with Border

To order samples, go to [usg.com](http://usg.com)



Beech



Maple



Light Cherry



Dark Cherry



Walnut



Red Oak



Light Bamboo



Dark Bamboo

		Lay-In Panels		Planks					
True™ Wood Lay-In Panels	FL 	2'x2'x3/4"	2'x4'x3/4"	1'x4'x3/4"	1'x5'x3/4"	2'x6'x3/4"	2'x8'x3/4"	20'x60'x3/4"	30'x60'x3/4"
	SL 								
	AR 	2'x2'x3/4"	2'x4'x3/4"						

All USG True Wood perforated and channel panels include an integrated acoustical backer to provide a high level of sound performance without the expense and additional labor of acoustical blankets.  
 NOTE: All True Wood Plank Panels must be installed with stabilizer bars. See form # IC592.

Panel Size	Class	Grid Options	NRC	CAC	Trim Options
					4" Nominal (3 3/4"x8')
<b>Nominal 4 1/2" Module 3-3/4" x8'</b>	Class A	DWSS	.40	—	6" Nominal (5 1/4"x8')
<b>Nominal 6" Module 5-1/4" x8'</b>	Class A	DWSS	.35	—	

Linear panels have a black fabric backing that overlaps panel-to-panel to create a clean black look in the reveal.

Grid Profile Options	D DX®/DXL™	E CENTRICITEE™ DXT™	F FINELINE® DXF™	G FINELINE 1/8 DXFF™	H IDENTITEE™ DXI™
					

Perforation Options*	Pattern Number	Hole (mm)	Spacing (mm)	% Open Area	NRC
	W100	6	16	10	.60
	W200	6	32	3	.30
	W300	8	16	20	.70
	W400	8	32	5	.40

Channel Options*	Pattern Number	Channel Width (mm)	Channel Depth (mm)	Spacing (mm centers)	Border (mm)	NRC
	W500	2	3.8	10	—	.65
	W500 (Border)	2	3.8	10	25.4	.55
	W600	2	3.8	5	—	.75
	W600 (Border)	2	3.8	5	25.4	.65

\* Not available in linear panels

 **High Recycled Content**

Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of post-consumer and pre-consumer (post-industrial) recycled content per FTC guidelines.

**For More Information**

**Product literature**  
 Data sheet: IC558  
 Finishes Sheet: IC559  
 Tech Guide: IC561  
**ASTM E84 surface burning characteristics**  
 Class A  
 Flame spread: 20  
 Smoke developed: 15

**ASTM E1264 Classification**  
 Composite — Class A Fire Performance  
 ASHRAE Standard 62.1, 2013  
**Weight**  
 3 lbs./sq. ft.  
**Material**  
 No added urea formaldehyde core, with face cut veneers.

**Notes**  
 1. Color Disclaimer: Printed and/or online color swatches are only reproductions of actual standards and will vary in appearance due to differences in monitor and printer output.

2. Wood Disclaimer: Wood is a natural grain product with variations in grain, texture and color often ranging from light to dark, thereby affecting the surface look. Product finishes are spray applied stain or sealer coats.

3. These representations should not be used to finalize color selection(s).  
 4. Building environmental conditions should be maintained in accordance with ASRAE Standard 62.1, 2013.  
 5. Refer to CISCA Wood Ceilings Technical Guidelines for best practices on installing wood ceilings.